

SCOPE Retrofit Measure Analysis Report

Comprehensive Energy and Financial Analysis

Executive Summary

This report compares energy consumption and operational costs between baseline and all applied renovation scenarios from CSV results. Embodied carbon is annualized using an analysis period of 30 years, while operational carbon is reported over 1 year. The construction cost data is from 2026 RSMeans Database. The embodied carbon is calculated using data from EC3 Environmental Product Declaration (EPD) Database. Since RSMeans Database is proprietary, users can adopt customized cost dataset when needed.

Building Information

- Weather File: USA_NY_Buffalo-Greater.Buffalo.Intl.AP.725280_TMY3.epw
- Building Name: SmallOffice
- Building Location: Buffalo, NY
- Total Floor Area: 511 m²

Renovation Details by Scenario


Scenario	Renovation Type	Renovation Details
Baseline	baseline	Baseline (no envelope renovation)
Scenario 1	wall + roof + window + door	Wall upgrade: • Exterior wall insulation: Extruded Polystyrene (XPS) Foam Board, target R-15.0 Roof upgrade: • Roof insulation: Blown Mineral Wool, target R-15.0

		Window upgrade: • 1-pane replacement (skipped: SimpleGlazing windows) • Weatherstrip application (skipped: no OperableWindow) • Glazing film application (skipped: SimpleGlazing windows) • Window frame replacement: wood window frame Door upgrade: • Door replacement: glass door (2 of 3 door(s) skipped: door type incompatibility)
Scenario 2	wall + roof + window + door	Wall upgrade: • Exterior wall insulation: Fiberglass Batts, target R-20.4 Roof upgrade: • Roof insulation: Blown Fiberglass, target R-34.5 Window upgrade: • 3-pane replacement (skipped: SimpleGlazing windows) • Weatherstrip application (skipped: no OperableWindow) • Glazing film application (skipped: SimpleGlazing windows) • Caulking application: acrylic • Window frame replacement: wood-aluminium window frame Door upgrade: • Door replacement: wooden door (1 of 3 door(s) skipped: door type incompatibility) • Bottom seal: automatic door bottom • Top/side seal: jamb weatherstrip


Scenario	Metric	Baseline	Renovation	Delta	Savings %
Scenario 1	Total Site Energy (GJ)	440.31	423.83	16.48	3.74%
Scenario 2	Total Site Energy (GJ)	440.31	416.92	23.39	5.31%

Key Performance Metrics

Operational Cost Saving (Scenario - Baseline) (\$/yr) Comparison

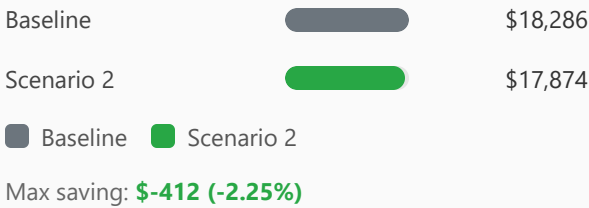

Operational Carbon Saving (Scenario - Baseline) (kg CO₂e/yr) Comparison

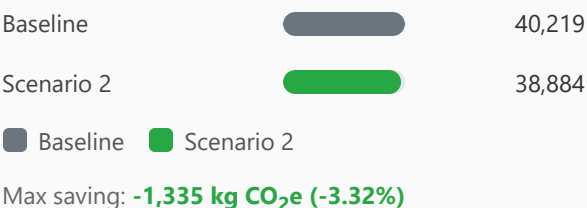

Min Retrofit Construction Cost

\$6,423

Scenario 1

Min Retrofit Embodied Carbon

22,145 kg CO₂e

Embodied carbon intensity (ECI): 43 kgCO₂e/m²
Scenario 2

Lowest Retrofit Cost Payback Period

18 years

Scenario 1

Lowest Retrofit Carbon Payback Period

17 years


Scenario 2

Comparative Visualizations between Renovation Scenarios

Spider Chart Visualization

Parametric Scenario Comparison (Normalized Spider Chart)



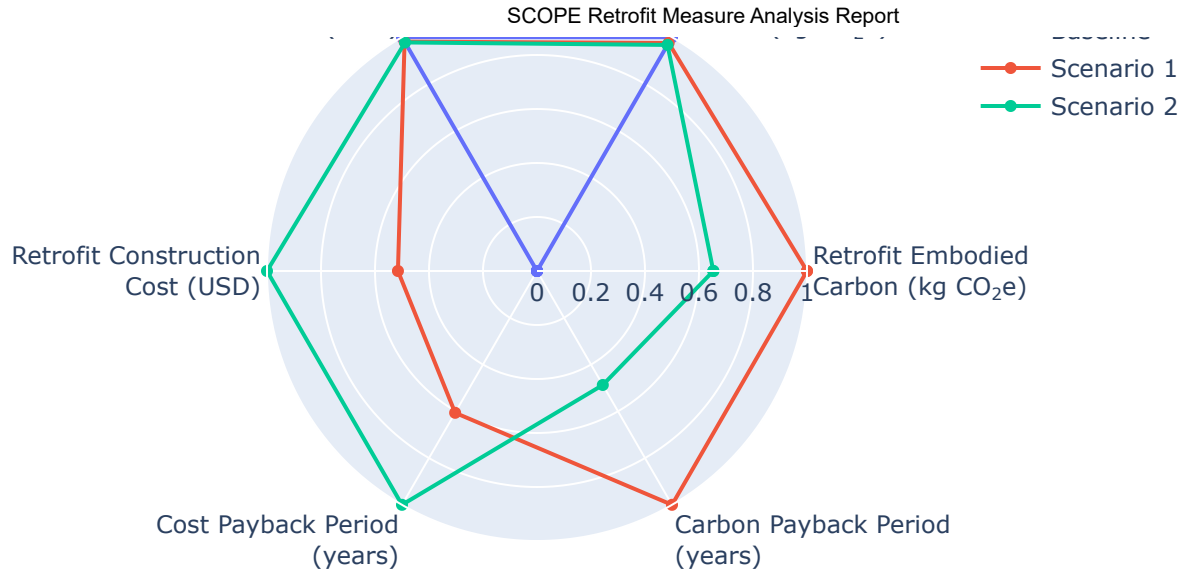

Payback Period of the Retrofit

Cost Payback Period

Payback = retrofit construction cost / abs(Operational Cost Saving (Scenario - Baseline) (\$/yr)).

Scenario 1		18 yrs
Scenario 2		30 yrs

Carbon Payback Period

Payback = retrofit embodied carbon / abs(Operational Carbon Saving (Scenario - Baseline) (kg CO2e/yr)).

Scenario 1		34 yrs
Scenario 2		17 yrs

Material List

Material properties and consumption by renovation scenario. Missing values are shown as N/A.

Scenario	Component	Material name	Volume (m³)	Area (m²)	Thickness (m)	Length (m)	Thermal Conductivity (W/m·K)	Density (kg/m³)	Product Lifetime (years)
Scenario 1	Wall insulation	Extruded Polystyrene (XPS) Foam Board	8.15	282	N/A	N/A	0.03	35	75

Scenario 1	Roof insulation	Blown Mineral Wool	61	599	0.10	N/A	0.03	90	30
Scenario 1	Window frame	wood window frame	N/A	6.51	N/A	N/A	N/A	N/A	15
Scenario 1	Window caulking	N/A	0.0034	N/A	N/A	N/A	N/A	N/A	10
Scenario 1	Door	glass door	N/A	3.91	N/A	N/A	0.10	2,500	30
Scenario 2	Wall insulation	Fiberglass Batts	17	282	N/A	N/A	0.03	30	60
Scenario 2	Roof insulation	Blown Fiberglass	144	599	0.24	N/A	0.03	30	68
Scenario 2	Window frame	wood-aluminium window frame	N/A	6.51	N/A	N/A	N/A	N/A	15
Scenario 2	Window caulking	acrylic	0.0034	N/A	N/A	N/A	N/A	N/A	10
Scenario 2	Door	wooden door	N/A	3.90	N/A	N/A	0.15	638	30
Scenario 2	Door bottom sealing	automatic door bottom	N/A	N/A	N/A	3.66	N/A	N/A	15
Scenario 2	Door top/side sealing	jamb weatherstripping	N/A	N/A	N/A	16	N/A	N/A	15

Result Summary


Per-scenario retrofit contribution breakdown. Each scenario includes two pie charts: cost and embodied carbon by retrofit measure.

Scenario 1

Cost breakdown by retrofit measure



Carbon breakdown by retrofit measure





- Wall: \$556 (8.7%)
- Roof: \$4,186 (65.2%)
- Window: \$1,353 (21.1%)
- Door: \$327 (5.1%)

Total: \$6,423




- Wall: 2,374 (7.0%)
- Roof: 19,122 (56.4%)
- Window: 11,437 (33.7%)
- Door: 972 (2.9%)

Total: 33,906 kg CO₂e

Scenario 2


Cost breakdown by retrofit measure



- Wall: \$1,099 (8.8%)
- Roof: \$9,288 (74.5%)
- Window: \$1,418 (11.4%)
- Door: \$666 (5.3%)

Total: \$12,471

Carbon breakdown by retrofit measure



- Wall: 75 (0.3%)
- Roof: 9,669 (43.7%)
- Window: 12,160 (54.9%)
- Door: 241 (1.1%)

Total: 22,145 kg CO₂e

Scenario	Retrofit Embodied Carbon (kg CO ₂ e)	Retrofit Construction Cost (USD)	Annual Operational Carbon (kg CO ₂ e)	Annual Operational Cost (USD)
Baseline	0.00	\$0.00	40,219	\$18,286
Scenario 1	33,906	\$6,423	39,223	\$17,936
Scenario 2	22,145	\$12,471	38,884	\$17,874

Generated: May 07, 2026 | Report Type: Retrofit Impact Analysis | Run: run_test_011