

SCOPE Retrofit Measure Analysis Report

Comprehensive Energy and Financial Analysis

Executive Summary

This report compares energy consumption and operational costs between baseline and all applied renovation scenarios from CSV results. Embodied carbon is annualized using an analysis period of 30 years, while operational carbon is reported over 1 year. The construction cost data is from 2026 RSMeans Database. The embodied carbon is calculated using data from EC3 Environmental Product Declaration (EPD) Database. Since RSMeans Database is proprietary, users can adopt customized cost dataset when needed.

Building Information

- Weather File: USA_MN_Duluth.Intl.AP-Duluth.ANGB.727450_TMYx.epw
- Building Name: SmallOffice
- Building Location: Duluth, MN
- Total Floor Area: 511 m²

Renovation Details by Scenario

Scenario	Renovation Type	Renovation Details
Baseline	baseline	Baseline (no envelope renovation)
Scenario 1	roof	Roof upgrade: • Roof insulation: Blown Fiberglass, target R-30.0
Scenario 2	wall + roof + window + door	Wall upgrade:

		• Exterior wall insulation: Extruded Polystyrene (XPS) Foam Board, target R-10.0 (skipped: target R-value already satisfied) Roof upgrade: • Roof insulation: Blown Mineral Wool, target R-15.0 Window upgrade: • 1-pane replacement (skipped: SimpleGlazing windows) • Weatherstrip application (skipped: no OperableWindow) • Glazing film application (skipped: SimpleGlazing windows) Door upgrade: • Door replacement: glass door (2 of 3 door(s) skipped: door type incompatibility)
--	--	--

Scenario 3	wall + roof + window + door	Wall upgrade: - Exterior wall insulation: Expanded Polystyrene (EPS) Foam Board, target R-30.0 Roof upgrade: - Roof insulation: Polyiso Insulation Foam Board, target R-25.0 Window upgrade: 2-pane replacement (skipped: SimpleGlazing windows) - Weatherstrip application (skipped: no OperableWindow) - Glazing film application (skipped: SimpleGlazing windows) - Caulking application: polyurethane Door upgrade: - Door replacement: polystyrene core steel door (1 of 3 door(s) skipped: door type incompatibility) - Bottom seal: brush weatherstrip - Top/side seal: silicone adhesive smoke gasket
------------	-----------------------------	---

Annual Energy Analysis

Scenario	Metric	Baseline	Renovation	Delta	Savings %
Scenario 1	Total Site Energy (GJ)	236.54	234.42	2.12	0.90%
Scenario 2	Total Site Energy (GJ)	236.54	228.19	8.35	3.53%
Scenario 3	Total Site Energy (GJ)	236.54	222.75	13.79	5.83%

Key Performance Metrics

Operational Cost Saving (Scenario - Baseline) (\$/yr) Comparison

Operational Carbon Saving (Scenario - Baseline) (kg CO₂e/yr) Comparison

Baseline

\$9,841

Scenario 3

\$9,379

Baseline

Scenario 3

Max saving: \$-462 (-4.69%)

Baseline

20,894

Scenario 3

19,974

Baseline

Scenario 3

Max saving: -920 kg CO₂e (-4.40%)

Min Retrofit Construction Cost

\$7,922

Scenario 1

Min Retrofit Embodied Carbon

8,391 kg CO₂e

Embodied carbon intensity (ECI): 16 kgCO₂e/m²
Scenario 1

Lowest Retrofit Cost Payback Period

75 years


Scenario 1

Lowest Retrofit Carbon Payback Period

13 years

Scenario 3

Comparative Visualizations between Renovation Scenarios

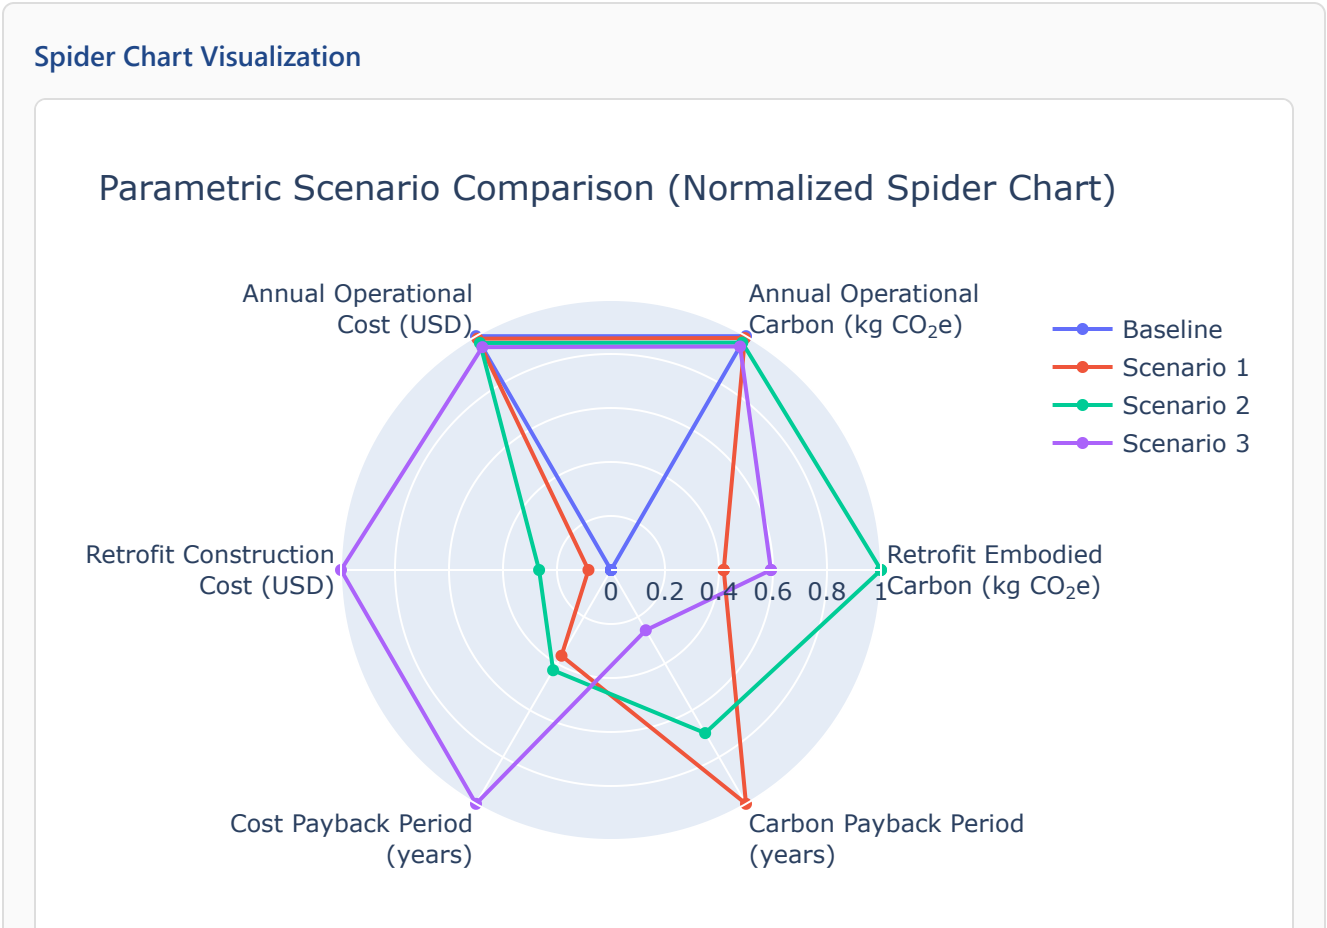

Payback Period of the Retrofit

Cost Payback Period

Payback = retrofit construction cost / abs(Operational Cost Saving (Scenario - Baseline) (\$/yr)).

Scenario 1		75 yrs
Scenario 2		88 yrs
Scenario 3		205 yrs

Carbon Payback Period

Payback = retrofit embodied carbon / abs(Operational Carbon Saving (Scenario - Baseline) (kg CO₂e/yr)).

Scenario 1		50 yrs
Scenario 2		35 yrs
Scenario 3		13 yrs

Material List

Material properties and consumption by renovation scenario. Missing values are shown as N/A.

Scenario	Component	Material name	Volume (m ³)	Area (m ²)	Thickness (m)	Length (m)	Thermal Conductivity (W/m·K)	Density (kg/m ³)	Product Lifetime (years)
Scenario 1	Roof insulation	Blown Fiberglass	125	599	0.21	N/A	0.03	30	68
Scenario 2	Wall insulation	Extruded Polystyrene (XPS) Foam Board	N/A	N/A	N/A	N/A	0.03	35	75
Scenario 2	Roof insulation	Blown Mineral Wool	61	599	0.10	N/A	0.03	90	30
Scenario 2	Window caulking	N/A	0.0034	N/A	N/A	N/A	N/A	N/A	10
Scenario 2	Door	glass door	N/A	3.91	N/A	N/A	0.10	2,500	30


Scenario 3	Wall insulation	Expanded Polystyrene (EPS) Foam Board	21	282	N/A	N/A	0.03	20	60
Scenario 3	Roof insulation	Polyiso Insulation Foam Board	104	599	0.17	N/A	0.03	29	60
Scenario 3	Window caulking	polyurethane	0.0034	N/A	N/A	N/A	N/A	N/A	10
Scenario 3	Door	polystyrene core steel door	N/A	3.90	N/A	N/A	0.10	472	30
Scenario 3	Door bottom sealing	brush weatherstripping	N/A	N/A	N/A	3.66	N/A	N/A	15
Scenario 3	Door top/side sealing	silicone adhesive smoke gasket	N/A	N/A	N/A	16	N/A	N/A	15

Result Summary

Per-scenario retrofit contribution breakdown. Each scenario includes two pie charts: cost and embodied carbon by retrofit measure.

Scenario 1


Cost breakdown by retrofit measure



Roof: \$7,922 (100.0%)

Total: \$7,922

Carbon breakdown by retrofit measure




Roof: 8,391 (100.0%)

Total: 8,391 kg CO₂e


Scenario 2

Cost breakdown by retrofit measure



Roof: \$23,537 (93.2%)
Door: \$1,731 (6.8%)
Total: \$25,268


Carbon breakdown by retrofit measure



Roof: 19,122 (95.2%)
Door: 972 (4.8%)
Total: 20,095 kg CO₂e


Scenario 3

Cost breakdown by retrofit measure



Wall: \$10,372 (10.9%)
Roof: \$77,862 (82.1%)
Window: \$4,953 (5.2%)
Door: \$1,695 (1.8%)
Total: \$94,883

Carbon breakdown by retrofit measure



Wall: 1,577 (13.2%)
Roof: 10,008 (84.1%)
Window: 52 (0.4%)
Door: 265 (2.2%)
Total: 11,902 kg CO₂e

Scenario	Retrofit Embodied Carbon (kg CO ₂ e)	Retrofit Construction Cost (USD)	Annual Operational Carbon (kg CO ₂ e)	Annual Operational Cost (USD)
Baseline	0.00	\$0.00	20,894	\$9,841
Scenario 1	8,391	\$7,922	20,727	\$9,736
Scenario 2	20,095	\$25,268	20,320	\$9,554
Scenario 3	11,902	\$94,883	19,974	\$9,379

Generated: May 06, 2026 | Report Type: Retrofit Impact Analysis | Run: run_test_006

